




# MECHANICAL GAUGE KIT PARTS AND ACCESSORIES II

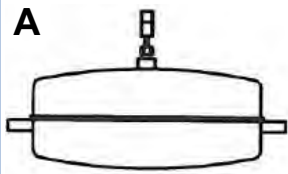


**A**  
HOLLOW SHELL FLOAT,  
GUIDED

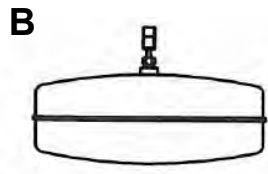


**B**  
HOLLOW SHELL FLOAT,  
UNGUIDED

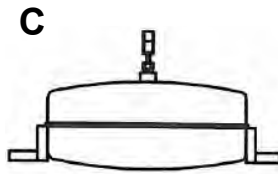


**C**  
HOLLOW SHELL  
INVERTED GUIDE CLIP




**D**  
HOLLOW SHELL PAN  
DAMPENER FLOAT




**E**  
HOLLOW SHELL CONE  
DAMPENER FLOAT




**F**  
SINGLE BALL FLOAT




**G**  
BALL FLOAT  
WITH WEAR RING




**H**  
BALL FLOAT, GUIDED

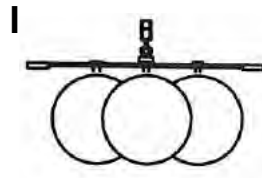


**I**  
TRI-BALL FLOAT




**J**  
BALL DAMPENER  
FLOAT




**K**  
SWIVELS, SHORT OR  
LONG

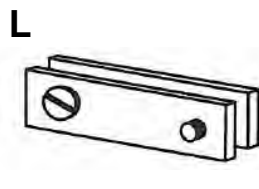


**L**  
TAPE/CABLE  
CLAMP




**M**  
FLOAT GUIDE CLIP




**N**  
SNAP FASTENER  
CONNECTOR




**O**  
BOLT SNAP  
CONNECTOR S/S




**P**  
TAPE THIMBLE




**Q**  
BLOCK VALVE




**R**  
HI-PRESSURE ELBOWS




**S**  
HI-PRESSURE GAUGES




**T**  
NEGATOR MOTOR

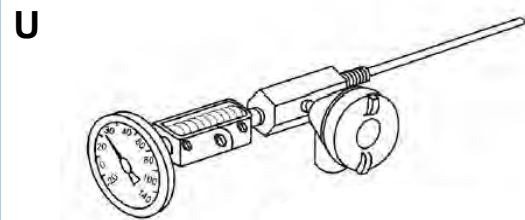

**U**  
BI-METAL RTD'S

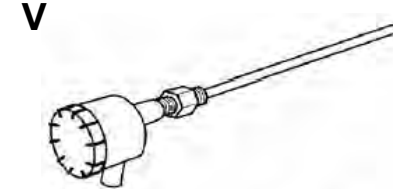

**V**  
RTD'S

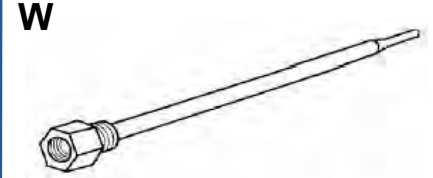

**W**  
THERMOWELL'S

**Note: Other Mechanical Gauge Parts & Accessories are available (Materials, etc.), contact Gauging Systems Inc. (GSI) for additional information**

On the back of this page there are part numbers and descriptions that correlate to the drawings above. For a quotation on these parts fill in the quantities on the reverse side. Provide your name, e-mail, company, address, phone, fax, e-mail, and forward the list for quotation to:



**Gauging Systems Inc.**

910 Industrial Blvd. • Suite A • Sugar Land • Texas • 77478

Phone: (281) 980 - 3999 • Fax: (281) 980 - 6929

Email: GSIHOUTX@msn.com • gaugingsystemsinc.com

Name:	E-mail:	
Company:	Phone:	Fax:
Bill To: _____	Ship To: _____	

QTY	ITEM	GSI PART NO.	REF. 1	REF. 2	DESCRIPTION	PRICE	AMOUNT
	A	GSI-FL-13-HS-G			Float, 13" Guided, Hollow Shell 316 S/S		
		GSI-FL-17-HS-G	BM9074-000		Float, 17" Guided, Hollow Shell 316 S/S		
	B	GSI-FL-13-HS-U			Float, 12" Unguided, Hollow Shell 316 S/S		
		GSI-FL-17-HS-U			Float, 15" Unguided, Hollow Shell 316 S/S		
	C	GSI-FL-13-HS-IC		JC3010-8	Float, 13" Inverted Guide Clips, Hollow Shell 316 S/S		
		GSI-FL-17-HS-IC			Float, 17" Inverted Guide Clips, Hollow Shell 316 S/S		
	D	GSI-FL-13-PD			Float, 13" Guided, Hollow Shell Pan Dampener 316 S/S		
		GSI-FL-17-PD			Float, 17" Guided, Hollow Shell Pan Dampener 316 S/S		
	E	GSI-FL-13-HS-CD			Float, 13" Guided, Hollow Shell Cone Dampener 316 S/S		
		GSI-FL-17-HS-CD			Float, 17" Guided, Hollow Shell Cone Dampener 316 S/S		
	F	GSI-FL-8-B			Float, 8" Ball Unguided, Stainless Steel		
		GSI-FL-12-B			Float, 12" Ball Unguided, Stainless Steel		
	G	GSI-FL-8BWR316			Float, 8" Ball Unguided, W/ Wear Ring, 316 S/S		
		GSI-FL-12BWR316			Float, 12" Ball Unguided, W/ Wear Ring, 316 S/S		
	H	GSI-FL-13-B-G			Float, 12" Ball, 13" Guides, Stainless Steel		
		GSI-FL-17-B-G			Float, 12" Ball, 17" Guides, Stainless Steel		
	I	GSI-FL-17-3B-G	BM12411		Float, 8" Diameter Balls, Tri-Ball Float , 17" Guided, S/S		
	J	GSI-FL-13-BCD-G			Float, 12" Ball Cone Dampener, 13" Guides, Stainless Steel		
		GSI-FL-17-BCD-G			Float, 12" Ball Cone Dampener, 17" Guides, Stainless Steel		
	K	GSI-FL-SWVL-S			Float, Swivel; Short 3", 316 S/S		
		GSI-FL-SWVL-L			Float, Swivel; Long 8", 316 S/S		
	L	GA-T-CLAMP	BM9157	90142	Tape/Cable Clamp, 316 S/S		
	M	GA-FL-CLIP			Float, Guide Clip, 316 S/S		
	N	GA-FL-SNAP	BM5478-600		Float, Snap Type Fastener 316 S/S		
	O	GA-FL-BOLT			Float, Bolt Snap Swivel, Stainless Steel		
	P	GA-T-THIMBLE		514-504	Tape Thimble, Stainless Steel		
	Q	GSI-2776			Valve, Tape/Cable Block 2" 150# RF, S/S		
		GSI-2777			Valve, Tape/Cable Block 2" 300# RF, S/S		
		GSI-2778	2751V		Valve, Tape/Cable Block 1-1/2" 150# RF, S/S		
		GSI-2779	2752V		Valve, Tape/Cable Block 1-1/2" 300# RF, S/S		
	R	Rebuilt BM3661	BM3661		Elbow, 90 Degree 1-1/2" 150# RF Hi-Pressure		
		Rebuilt BM3491	BM3491		Elbow, 90 Degree 1-1/2" 300# RF Hi-Pressure		
	S	Rebuilt 2520	BM5503-531		Rebuilt 2520 Hi-Pressure Gauge, 1-1/2" 150# RF		
		Rebuilt 2530	BM5502-531		Rebuilt 2530 Hi-Pressure Gauge, 1-1/2" 300# RF		
	T	G-2570-49	P1-5		Negator Motor (ONLY) Standard (.010 Thick) Tanks up to 66 Ft.		
		G-2570-49-EXL	P1-22		Negator Motor (ONLY) (.010 Thk) Extra Long, Tanks up to 99 Ft.		
		G-2570-49-EXHL	P1-26		Negator Motor (ONLY) Extra Heavy (.012 Thick) & Extra Long		
	U	GSI-4030-24-S			Bi-Metal RTD, 0-140 Degrees F/C, 5" Dial Face; Adj., 24" Stem		
		GSI-4030-24-L			Bi-Metal RTD, 0-250 Degrees F/C, 5" Dial Face; Adj., 24" Stem		
		GSI-4030-24-H			Bi-Metal RTD, 50-400 Degrees F/C, 5" Dial Face; Adj., 24" Stem		
		GSI-4030-36-S			Bi-Metal RTD, 0-140 Degrees F/C, 5" Dial Face; Adj., 36" Stem		
		GSI-4030-36-L			Bi-Metal RTD, 0-250 Degrees F/C, 5" Dial Face; Adj., 36" Stem		
		GSI-4030-36-H			Bi-Metal RTD, 50-400 Degrees F/C, 5" Dial Face; Adj., 36" Stem		
	V	G12011-18			RTD, 100 ohms @ Zero Degrees C, Platinum, 3 Wire, 18" Stem		
		G12011-24			RTD, 100 ohms @ Zero Degrees C, Platinum, 3 Wire, 24" Stem		
		G12011-36			RTD, 100 ohms @ Zero Degrees C, Platinum, 3 Wire, 36" Stem		
		G11011-18			RTD, 100 ohms @ 25 Degrees C, Copper, 3 Wire, 18" Stem		
		G11011-24			RTD, 100 ohms @ 25 Degrees C, Copper, 3 Wire, 24" Stem		
		G11011-36			RTD, 100 ohms @ 25 Degrees C, Copper, 3 Wire, 36" Stem		
	W	W10-18			Thermowell, S/S, .260 Bore, 3/4" NPT x 1/2" NPT, 18" Length		
		W10-24			Thermowell, S/S, .260 Bore, 3/4" NPT x 1/2" NPT, 24" Length		
		W10-36			Thermowell, S/S, .260 Bore, 3/4" NPT x 1/2" NPT, 36" Length		